Der Schaltschrankheizer kann über die Bohrungen im Blech befestigt werden.
Es sind 2 Varianten zu empfehlen.
Variante A: Hochformat, Befestigung an 1&2 oder 5&6, weitere nach Bedarf
Variante B: Querformat, Befestigung über 1&5 oder 2&6, weitere nach Bedarf
Es müssen mindestens 2 Befestigungspunkte an der oberen Seite des Bleches genutzt werden.
Die Abstände der 4 Löcher (1,2,5,6) zu den Ecken sind in allen Größen gleich. Die Position der Löcher 3&4 sind spezifisch. Die Werte sind in der Tabelle angegeben und gültig, wenn der Anschluss nach unten/rechts zeigt.

The enclosure heater can be mounted using the holes in the sheet metal.
Two mounting options are recommended.
Option A: Portrait orientation, mount at points 1&2 or 5&6, additional points as needed
Option B: Landscape orientation, mount at points 1&5 or 2&6, additional points as needed
At least two mounting points on the top of the sheet metal must be used.
The distances of the four holes (1,2,5,6) from the corners are the same for all sizes. The positions of holes 3 and 4 are specific to each size. The dimensions in the table are valid as long as the cable points to the bottom or right side.

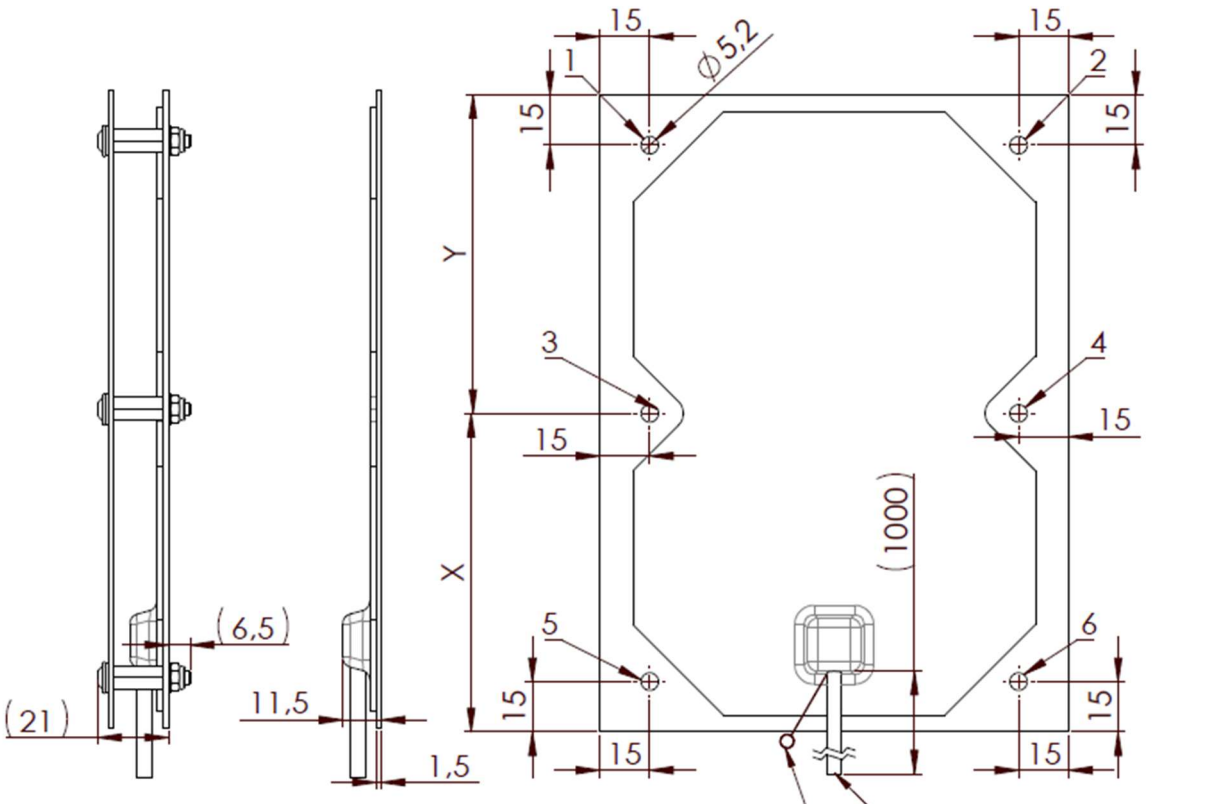

Art. Nr.	X [mm]	Y [mm]	Power [W]
145322/24	95	95	50
145326/28	155	185	100
145380/83	155	185	150
145385/87	155	185	200
145389/92	195	225	250